

 **CAUTION:** Read the instructions before using the machine. 



# PowerVac

## Model 240000

### Installation & Owner's Guide



INCREIBLY POWERFUL®

**INDUSTRIAL VACUUM SYSTEMS**

[www.IVS-Vacuum.com](http://www.IVS-Vacuum.com)  
800.968.8227



## ***INDUSTRIAL VACUUM SYSTEMS***

***Thank You for your Purchase of  
an IVS Vacuum!***

These heavy-duty vacuum systems were engineered and manufactured to tackle the toughest vacuuming jobs.

**Original Instructions** follow for the PowerVac 240000 Series along with detailed safety, warranty and installation information.



MODEL 240000

## **Table of Contents**

<b>IMPORTANT SAFETY INSTRUCTIONS</b>	<b>1</b>
<b>Limited Warranty</b>	<b>2</b>
<b>Vac Motor Warranty Policy</b>	<b>3</b>
<b>Typical Installation and Proper Placement</b>	<b>4</b>
<b>Electrical Connection</b>	<b>5</b>
<b>Easy Installation Guide</b>	<b>6 - 7</b>
<b>GS-403 Timer Setup</b>	<b>8 - 10</b>
<b>IDX411E Timer Setup</b>	<b>11</b>
<b>Troubleshooting</b>	<b>12</b>
<b>Maintenance</b>	<b>11</b>
<b>Parts Guide</b>	<b>12 - 18</b>
<b>Unit Options</b>	<b>19 - 21</b>



# IMPORTANT SAFETY INSTRUCTIONS

When using an electrical machine, basic precautions should always be followed, including the following:

## READ ALL INSTRUCTIONS BEFORE USING THIS MACHINE

This machine is not intended for household use. It is intended for commercial use.

This machine is not intended for wet pick up use.

## WARNING – To reduce the risk of fire, electric shock, or injury:

1. This machine must be connected to a permanent electrical power supply in full compliance with all applicable codes and ordinances by qualified personnel only. Read Grounding Instructions.
2. Do not use on wet surfaces.
3. Do not allow to be used as a toy. Close attention is necessary when used by or near children.
4. Use only as described in this manual. Use only manufacturer's recommended attachments
5. Do not operate or handle machine with wet hands.
6. Do not put any object into any openings. Do not use with any opening blocked; keep free of dust, lint, hair, and anything that may reduce air flow.
7. Keep hair, loose clothing, fingers, and all parts of the body away from openings and moving parts.
8. Do not use to pick up flammable or combustible liquids, such as gasoline, or use in areas where they may be present.
9. Do not pick up anything that is burning or smoking, such as cigarettes, matches, or hot ashes.
10. Do not pick up hazardous dust or particulate.
11. Do not use without dust bags or filters in place.

## GROUNDING INSTRUCTIONS

This machine must be connected to a grounded metal, permanent wiring system; or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the machine.

## DANGER

This machine incorporates parts such as switches, motors, or the like that tend to produce arcs or sparks that can cause an explosion. When located in gasoline-dispensing and service stations, install and use at least 20 ft (6 M) horizontally from the exterior enclosure of any dispensing pump and at least 18 in (450 mm) above a driveway or ground level.

European Installations: Installation of this machine must incorporate and provide full disconnection of all poles in the event an overvoltage category III condition. Such incorporation to the fixed wiring must be in accordance with the wiring rules.

## SAVE THESE INSTRUCTIONS





MODEL 240000

## Limited Warranty

Industrial Vacuum Systems (Company) provides a limited one year warranty on components and piece of equipment produced by the Company to be free from defects in material and workmanship. Electrical assemblies see Appendix A, have a limited two year warranty on the controller to be free from defects in material and workmanship. This limited warranty does not cover equipment that has been damaged due to misuse, misapplication, modification, altered, neglected, attempted theft, vandalism, connection to improper voltage supply, modification, or such parts that are commonly recognized to be subject to wear in normal usage. Normal use products are, but not limited to, those listed on Appendix B; which are warranted for 90 days. Every component and piece of equipment is packaged to assist in safe handling of the product.

Claims must be submitted in writing within the appropriate coverage period as covered by this warranty, from date of shipment, to the Company's warranty/repair department. If the return is approved an RMA and labeling instructions will be issued and the product can be returned. Returned product without the appropriate RMA and label will be issued to scrap and all warranties/replacements will be considered null and void. If the product receiving the RMA is not returned within 20 days from date of issuing the RMA then any credit toward the product will be reduced by 25%. If the product is not returned within 30 days of issuing the RMA then any credit will be reduced by 50%. A testing fee of \$20.00 will be applied, if the product passes all tests related to the written claim, then the fee will be applied and paid prior to return of the product. If the product fails the test then the fee will not be applied. The Company may charge a 20% restocking fee for returned product and/or an order, which is canceled and/or material has already been ordered and/or received to fill such order.

The Company's warranty/repair department will inspect all components, submitted under warranty. Warranty replacement will be based solely on the analysis and confirmation that the product defect was caused by material and/or workmanship. The company reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured or to replace warranted product other than with redesigned product. In some cases it is easier for the customer to send a Company purchased product direct to the manufacturer for replacement. In those cases the customer will be notified that their product falls under that process and should work with that manufacturer directly. Appendix C shows the purchased parts that falls under this case.

This warranty covers the product replacement only; charges for damages, freight and/or labor will not be accepted. There are no warranties expressed or implied which extend beyond this Limited Warranty. The loss of use of the product, loss of time, inconvenience, commercial loss, incidental or consequential damages is not covered. The Company shall not be liable for incidental, special, or consequential damages including without limitation damages resulting from personal, bodily injury or death or damages to or loss of use of property.

### APPENDIX A

2-Year Warranty Controllers  
Sensortron, Multitron, Touchtron, Timers, Liberator

### APPENDIX B

90-Day Warranty Components  
Pressure Hoses, Swivels, Nozzles, Safety Shut-off Guns, Seals, O-Rings, Shop Vac

### APPENDIX C

Purchased Products that are Handled Direct with the Manufacturer  
Shop Vac, IDX Big Timer, Bill Acceptors, Compressors, Pump Motors



© 2017 Industrial Vacuum Systems



MODEL 240000

## Vac Motor Warranty Policy

Applies to Vacuums and Combination Vacuums and Service Part Kits containing the GinSan Vacuum Motor part number 105111 or 105112.

GinSan will warrant Vacuum motors against defect in original manufacture for a period of one year from the date the vacuum or service part motor ships from GinSan. Additionally, Vacuum Motor Brushes installed in these 2 motors will be warranted against defect in original manufacture for a period of 90 days from the date of shipment from GinSan.

This warranty requires that the vacuum and motor must receive proper operational maintenance that includes proper filter, motor gasket, filter screen, and motor brush maintenance.

GinSan's liability is limited to replacement parts only. Labor for removal or installation is not covered.

Motor or Brush failure resulting from abuse, misuse, filter failure, or improper or inadequate maintenance will not be covered. Motor or Brush failure that is due to brushes worn beyond the physical wear life of the brush is not covered. Except in the case of original factory installation, Motor or Brush failure due to improper or inadequate installation will not be covered.

Warranty claims must be evaluated by GinSan. Replacement Motor(s) and/or Motor Brush Kit(s) must first be ordered and invoiced as a service part. An RMA number will be issued at that time. The customer is required to return the failed Motor and/or Motor Brushes to GinSan with the RMA number prominently on the outside of the package. Failed motors must be shipped within 14 calendar days of the shipping date of the replacement Motor and/or Brushes. Customers are encouraged to record a tracking number from the shipper. Shipper data will be the only data used to determine adherence to this policy.

When received, failed Motors and/or Brushes will be evaluated within 5 business days. Motors and/or Brushes that are evaluated as being under warranty will have the invoice for the replacement parts, including shipping, credited within 5 business days of the completion of the evaluation. If a Motor or Brush kit is evaluated to be not covered by this warranty, the customer will be notified within 2 business days. At that time, the customer will have the option to have the failed Motor and/or Brushes returned to them at their expense or they can instruct GinSan to dispose of the components locally.

Motors and/or Motor Brushes that are covered by warranty will be retained by GinSan and processed according to its internal policies.

This warranty shall apply only to vacuum motors GinSan Part Number 105111 and 105112 and the Motor Brushes installed in them.





MODEL 240000

# Installation Guide for Model 240000


## SITE PREPARATION

Select and prepare a solid, level site for a concrete or similar base. Consider: Vehicle traffic, ease of access, weather protection and lighting to enhance vacuum performance and income. Consult local code for foundation requirements. Note: 20" base height above surrounding surface provides minimum protection against typical vehicle bumper damage. 30" base height is maximum considering the ON/OFF switch position.



**CAUTION ELECTRICAL SHOCK  
HAZARD - DISCONNECT POWER  
PRIOR TO BEGINNING ANY SERVICE  
OR INSTALLATION WORK. CONTACT  
A TRAINED ELECTRICIAN IF YOU ARE  
UNSURE OF THESE PROCEDURES.**

- 1 Determine the best orientation for each vacuum. Consider the traffic flow through the vacuum and detailing area along with the best sequencing of extra services. Contact your distributor for assistance.
- 2 Make sure that vacuums will be easily accessible for customer use and servicing. Customers should have easy access to the ON/OFF switch and be able to reach the hose and replace the hose after use. NOTE: The hatched area in the drawing to the right shows the clearance area required for service door opening.

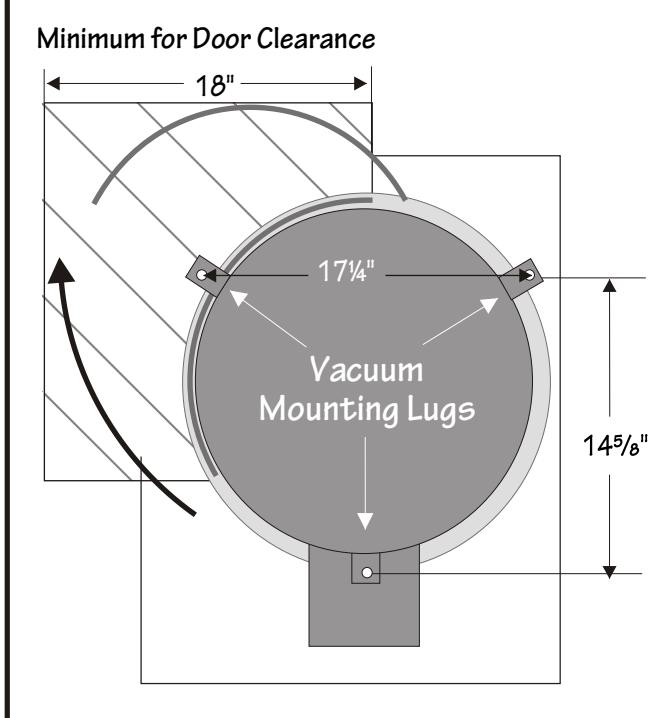

© 2017 Industrial Vacuum Systems



## Electrical Connection

# IMPORTANT SAFETY INSTRUCTIONS. READ ALL INSTRUCTIONS BEFORE USING THIS APPLIANCE.



Connect to electrical service. This unit is rated at 14 Amps, 120 VAC, (operating). It should be connected to 20 Amp single circuit service. Check local codes and requirements and refer to "IMPORTANT SAFETY INSTRUCTIONS" sheet in this manual.



**CAUTION ELECTRICAL SHOCK HAZARD - DISCONNECT POWER  
PRIOR TO BEGINNING ANY SERVICE OR INSTALLATION WORK. CONTACT  
A CERTIFIED OR LICENSED ELECTRICIAN IF YOU ARE UNSURE OF  
THESE PROCEDURES.**

### ELECTRICAL REQUIREMENTS


To maintain the product's electrical listing it is necessary to connect the power supply of this vacuum directly to the timer terminal strip. (Remove the test cable.) A suitable connection must be made between the supply junction box (which can be located inside the intake shroud cover) and the terminal strip on the timer. To locate the electrical supply conduit measure approximately 2 inches to left of the center line of the front mounting lug. The measure approximately 2 inches in front of that location to provide adequate space for a 2 inch by 4 inch junction box. The box should be placed so that the top of the box is 12 inches (max.) from the base. **Always check local codes.** See illustration below for dimensions.

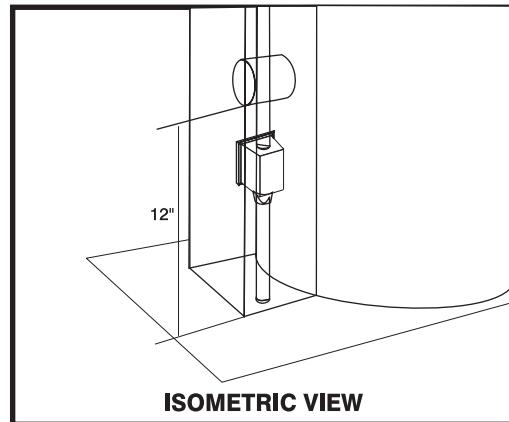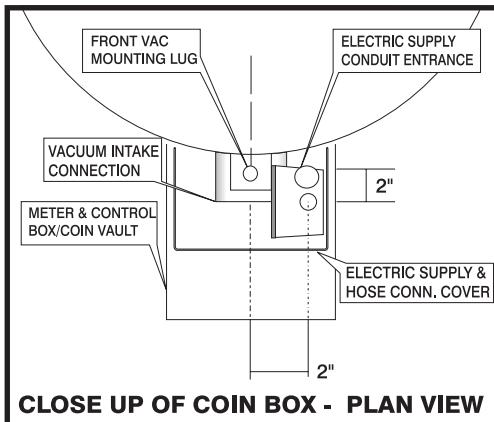



MODEL 240000

# Easy Installation Guide

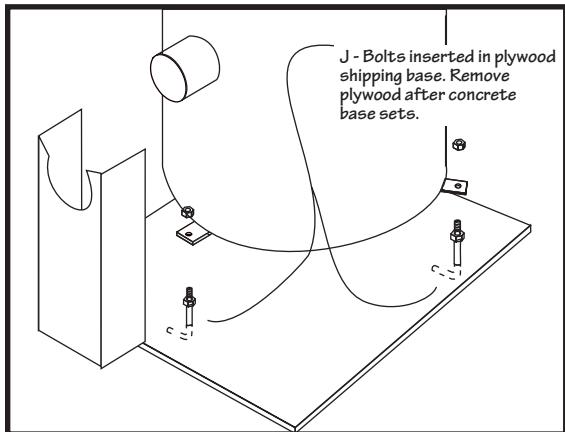


## USING "J" BOLTS:

J-Bolts (new construction only). Carefully locate 3 "J" bolts while forming concrete or masonry base. The plywood shipping base can be used as a locating fixture for the "J" bolts while the concrete is formed. See illustration to the left.

## MASONRY ANCHORS:

Anchors are used for existing construction only. Drill and install suitable masonry anchors to accommodate a  $3/8$ " lag screw. Check anchor supplier information for proper drill size.

**HINT:** Use the plywood base as a template for drilling the anchoring pilot holes. See illustration to the right.

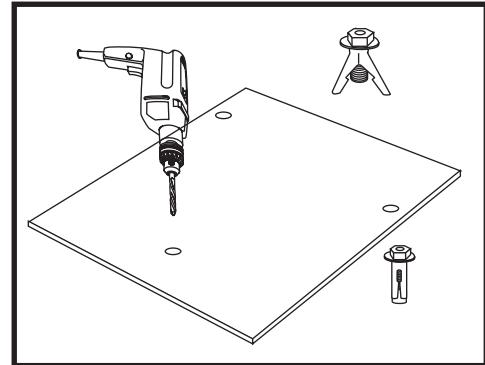

© 2017 Industrial Vacuum Systems





MODEL 240000

# Easy Installation Guide

## LOCATE VAULT DROP:

Refer to vault manufacturer's drawings or specifications to accurately determine the position of the vacuum required to align the coin inlet on the vault with the coin drop nipple on the vacuum. Dimension "D" in drawing represents required "set back" from the front edge of the base to the center of coin drop opening in the vault. The front mounting lug of the vacuum should be located 1" to the right and  $2\frac{3}{16}$ " in front of this point. See illustration (and inset) to the right.

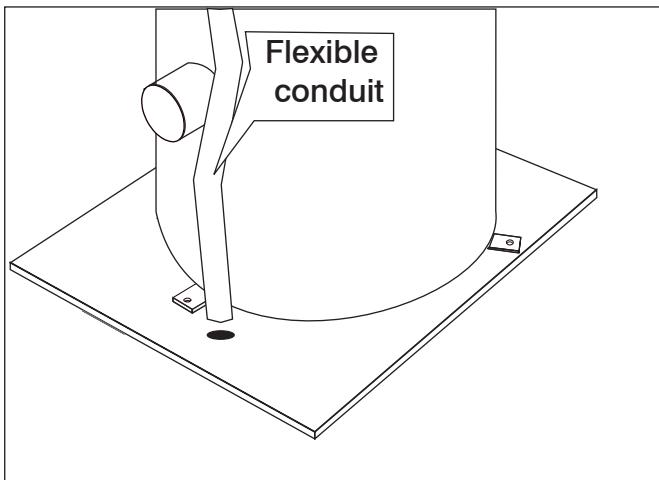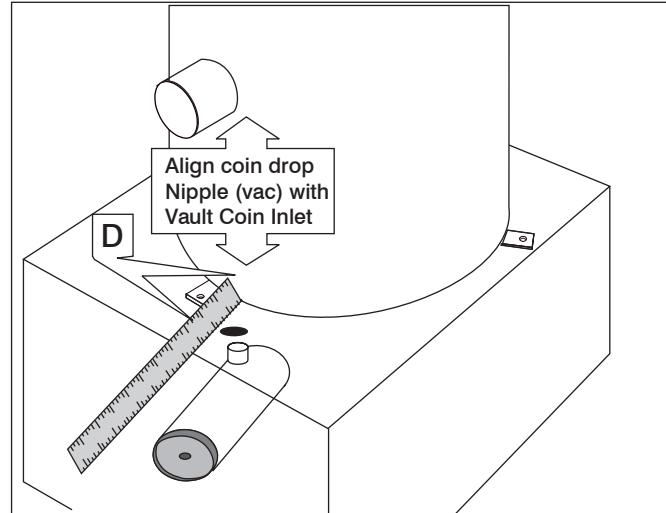

## COIN CONNECTION METHOD

Customer supplied conduit: Connect coin conduit from vault to 1 1/2" nipple on the bottom of the meter/control box (flexible conduit can be used to avoid creating any kinks or obstructions that can cause coin jams in the tube). Channel will conceal this tubing for security. See illustration to the left.




© 2017 Industrial Vacuum Systems



MODEL 240000

## Standard GS-403 Timer Setup

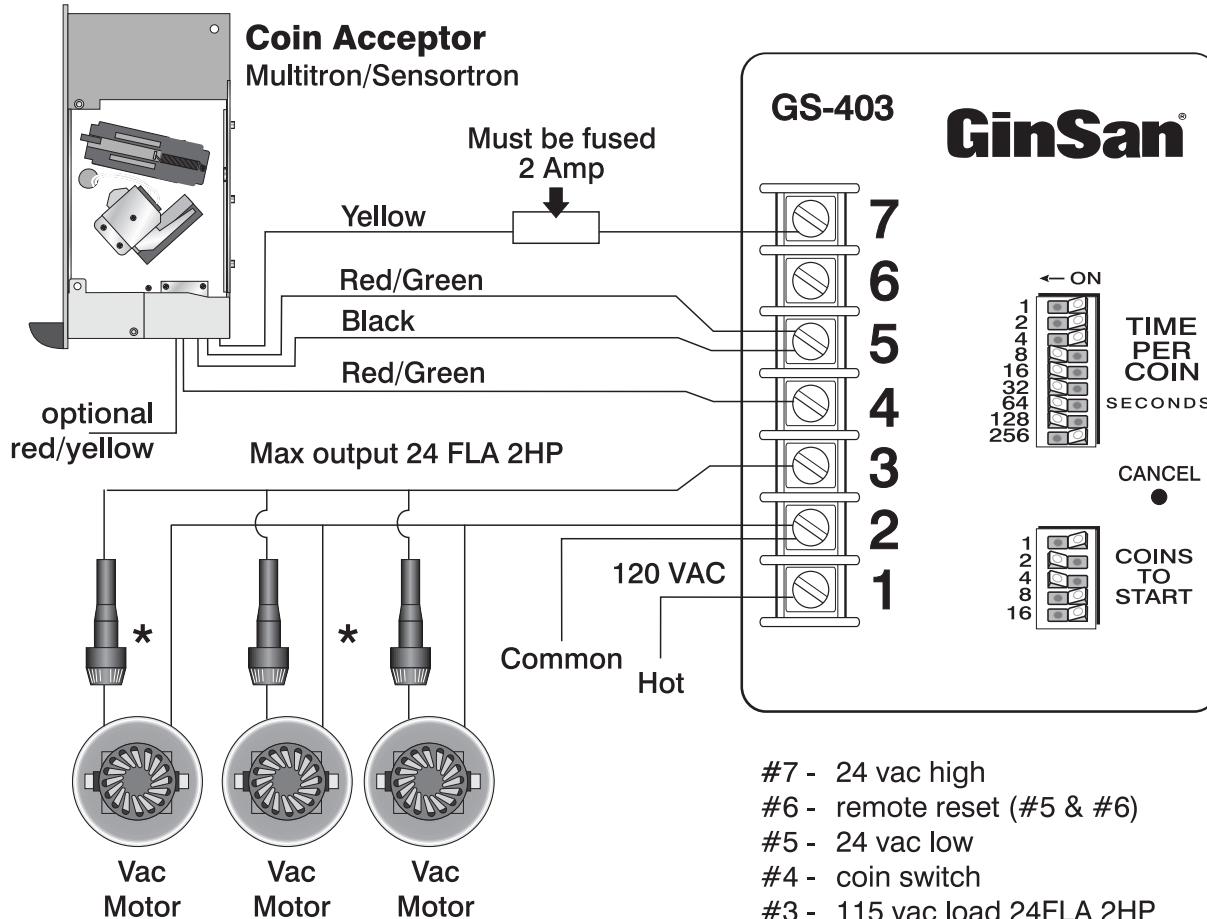


- #7 - 24 vac high
- #6 - remote reset (#5 & #6)
- #5 - 24 vac low
- #4 - coin switch
- #3 - 115 vac load 24FLA 2HP
- #2 - 115 vac common
- #1 - 115 vac line hot

\*Hook up wire must be min. 60°C

**Setting the COIN to START Switch**  
The *Coins to Start* is determined by adding the total number of switches in the "On" position.

**Example:  $1+2 = 3$  coins to start**

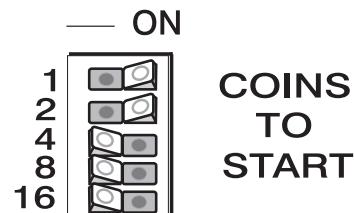



MODEL 240000

## Standard GS-403 Timer Setup

### Starting the Timer

Jump a wire between terminals #4 and #5. A count will register in the timer for every jump, which is the same as putting coins in the coin acceptor

### If Timer Fails to Start

Disconnect the switch wire on terminal #5 and repeat starting procedure.

**If timer starts at this point, the trouble may be...**

1. A bad coin switch or acceptor.
2. Broken wire or bad connection.
3. Wires shorted between terminals #4 and #5 or shorted between #5 and #6.

### Timer Starts on One Less Coin than Setting

Coin switch wired wrong (should be wired to normally open terminal & common terminal).

### Setting the **TIME PER COIN** Switch

Determine amount of coins to start the timer.

**Example:** 3 coins to start

Convert time desired to seconds.


**Example:** 5 min. = 300 seconds

Divide the total time (seconds) by the coins to start the timer.

**Example:** 300 sec. / 3 = 100 seconds per coin

The *Time per Coin* is determined by adding the total seconds of the switches in the "On" position. If for instance, the desired time is 100 seconds, switch on the number of switches needed to add up to 100 seconds.

**Example:** 100 sec. = 64 + 32 + 4

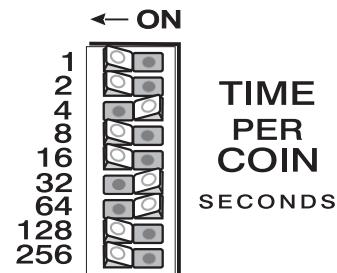




## Standard GS-403 Timer Setup


### Checking Power Out to Motors

A load of no less than .5 amps has to be hooked across terminals #2 and #3, to indicate time turning on. Without a load on the timer, it may not turn on or shut off. A volt meter across terminals #2 and #3 will indicate timer turning on and read output voltage. Check amp draw of motors using a clamp-on type amp meter.

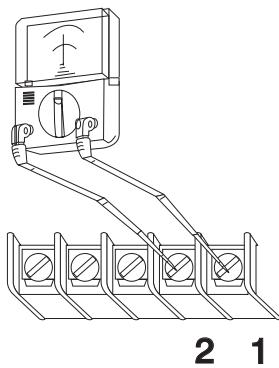


### Checking Power to Timer

Using a volt meter across terminals 1 and 2 will indicate incoming voltage.

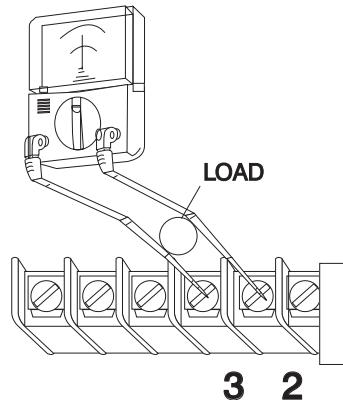

### Stopping the Timer

Use a jumper wire and touch across terminals #5 and #6. Or Press the Cancel button.

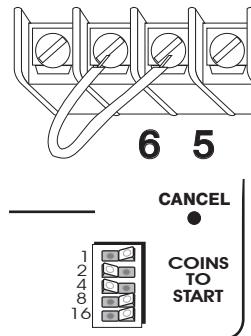

### If Timer will Not Stop

All time switches are in the off position.





MODEL 240000

## IDX411E Timer Setup


### TIMER INSTALLATION:

**"LINE" CONNECTIONS:** (These may need to be reconnected after first removing the test cable supplied from the factory. Directly connect power lead as illustrated and listed below):

- Connect the Line Power Lead (black) to Terminal #1
- Connect the Line Common Lead (white) Terminal #3
- Connect Line Ground Lead (green) to Terminal #4

**"LOAD" CONNECTIONS:** (These are pre-wired at the factory and are only listed for service purposes.)

- Common Motor Lead (white) is connect to Terminal #3
- Power Lead to Motors (black) is connected to Terminal #6
- Ground Lead from Motors is connected to Terminal #4
- Ground Jumper Wire is connect from Terminal #4 to Meter Panel/Coin Acceptor mounting screw
- **"CONTROL CONNECTIONS":** Normally open "NO" coin switch wire is connected to Terminal #7; Common Coin Switch to #8.

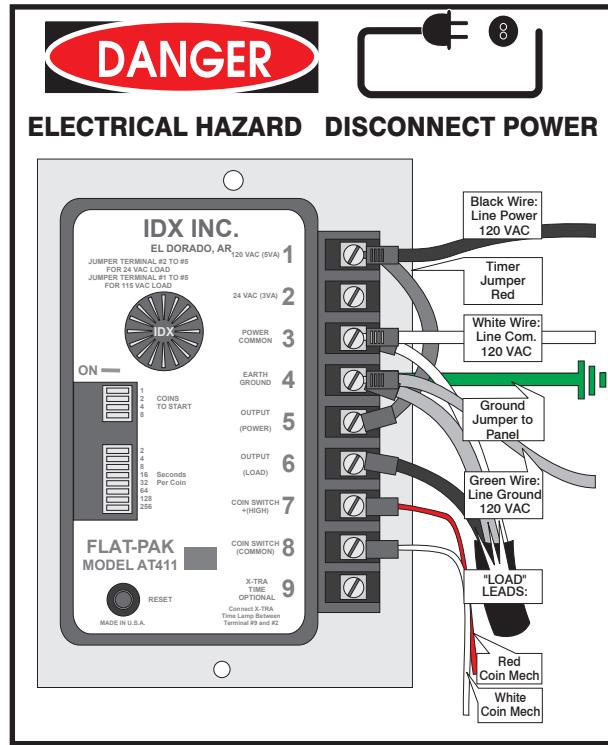

### TIMER PROGRAMMING:

The vacuum vending price and cycle time values are set by two banks of switches located on the timer. See the illustration to the right.


### SETTING THE "COINS TO START":

Determine a set for the number of coins to start (vend price). Use combination of switches to obtain the desired vend price. Example: \$.75 vend (3 quarters) to start is set by switching "on" "1" and "2".

### SETTING THE CYCLE TIME ("SECONDS PER COIN"):

Determine the "time per coin" in seconds.

Example: 4½ minute vend at \$.75 start-up price equals 90 seconds per coin. Calculation: (4½ minutes = 270 seconds; divided by 3 (coins) = 90 seconds per coin to start). Set 90 seconds per coin by switching "64", "16", "8" and "2" to "on".

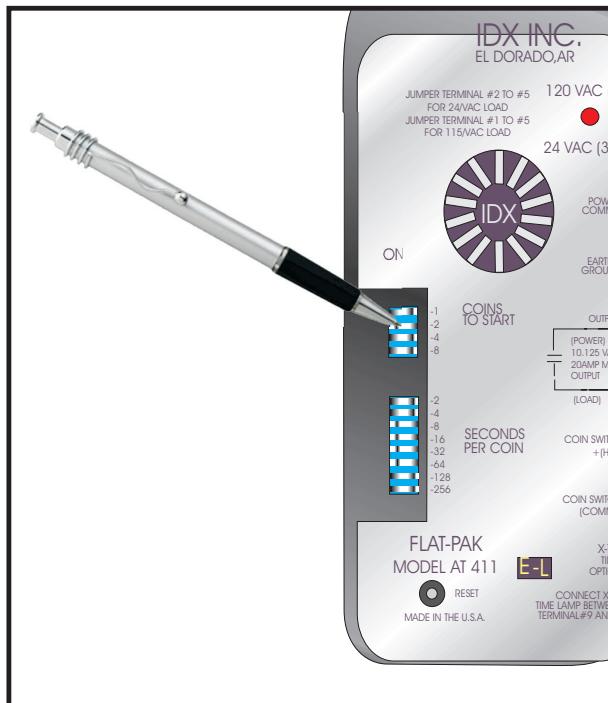

© 2017 Industrial Vacuum Systems



MODEL 240000

## Troubleshooting

<b>SYMPTOM:</b>	<b>PROBLEM:</b>	<b>CORRECTION:</b>
Won't start:	No power at unit test at "line" connection point on timer terminal.  Improper voltage.	Check electrical supply, fuses, breakers, etc. Make sure that breaker is not in a "tripped" position. Check for loose connections at service panel and at vacuum connection to service.  Use volt meter to determine that voltage is correct. Check at circuit breaker for correct voltage. (one vacuum per circuit)
	No power at motors.	Use volt meter or circuit tester to determine that power is available at timer. Bypass coin switch (use jumper wire) to start timer cycle.
Erratic start:	Coin mechanism not generating accurate "pulse" to timer.	Check coin switch trip wire for free travel. Check initial position of trip wire. Check coin switch wires for correct connection. (see "Timer Set-up section of this manual for details.)
Vending Problems:	Coin jams.	Check for "overfilled" coin box. Check for clearance of coin path to coin box (remove obstructions). Check "cradle" area of coin mechanism for severely bent coins. Check magnet for Canadian (magnetic) coins
Poor performance:	Poor suction:  Poor airflow:	Test by placing hand over hose end. Feel for "pull" with hose end sealed. Use a plastic bag or sheet to test for leaks at door opening. (Move sheet lightly past suspected areas - plastic will "stick" at leaks.)  Test for airflow (see "maintenance" section). An old golf ball or similar sized stone makes a great testing device. Problem is usually overfilled debris area or hose clog. Clean filters, check motors to be sure that both are working.
Other problems:	How to get additional technical help.	Call IVS at 800.442.7267 and ask for technical support. Please have serial number or the vacuum ready. Serial plate is located at the base of the tank near the hose and electrical connection cover.



© 2017 Industrial Vacuum Systems




## Routine Maintenance


Maintenance requirements are dependent on usage. It is best to time routine maintenance prior to peak usage periods and schedule service intervals according to business levels.




- 1 Inspect vacuum exterior. Clean equipment invites usage. Rinse with plain (preferably softened) water as necessary. (Be careful not to spray water upward under the dome-to-tank vent areas). **DO NOT USE STEEL WOOL OR OTHER FEFFOUS BRUSHES TO CLEAN STAINLESS STEEL SURFACES.**

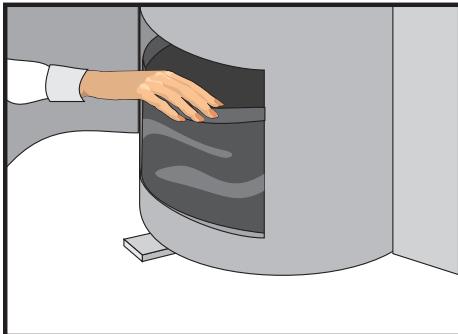

- 2 Remove dirt and debris from vacuum. HINT: Consider ordering a debris catcher (p/n 100700) from your distributor to simplify this process.  
**WEEKLY** - Shake filter. Clean or replace every 120 days depending on usage.

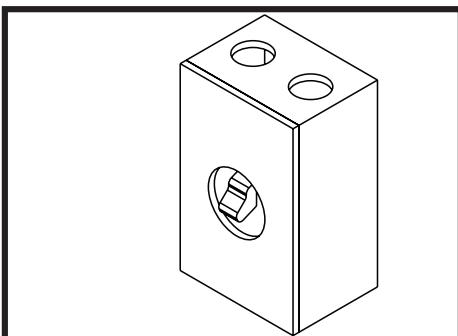

- 3 Check starter (or control) by activating the vacuum with the switch or starter.

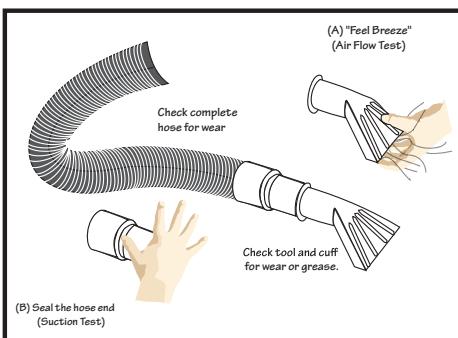


- 4 Check hose for signs of wear, replace if excessive. Test vacuum suction and airflow. Suction test: place hand tightly over cuff - feel for "pull". Airflow test: Hold cupped hand near hose inlet - feel for "breeze".





MODEL 240000

## Parts Sheet - Guide

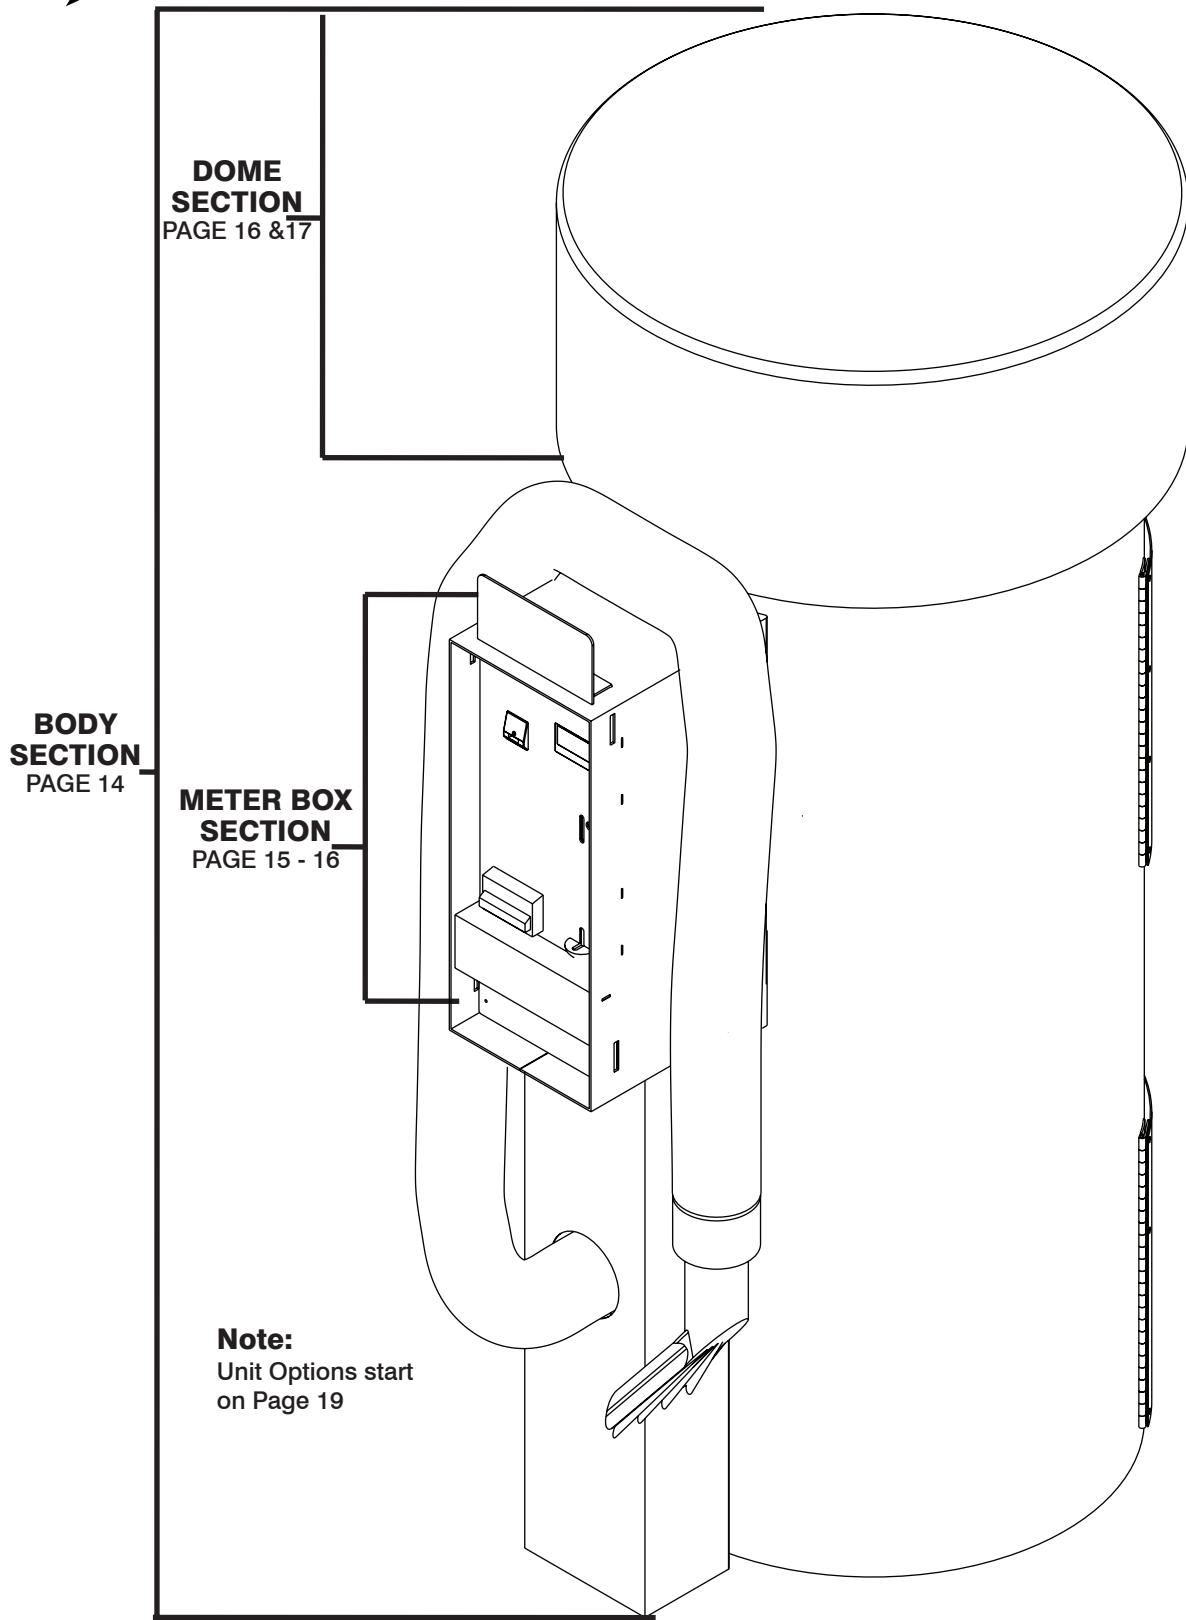


© 2017 Industrial Vacuum Systems



MODEL 240000

## Parts Sheet - Body

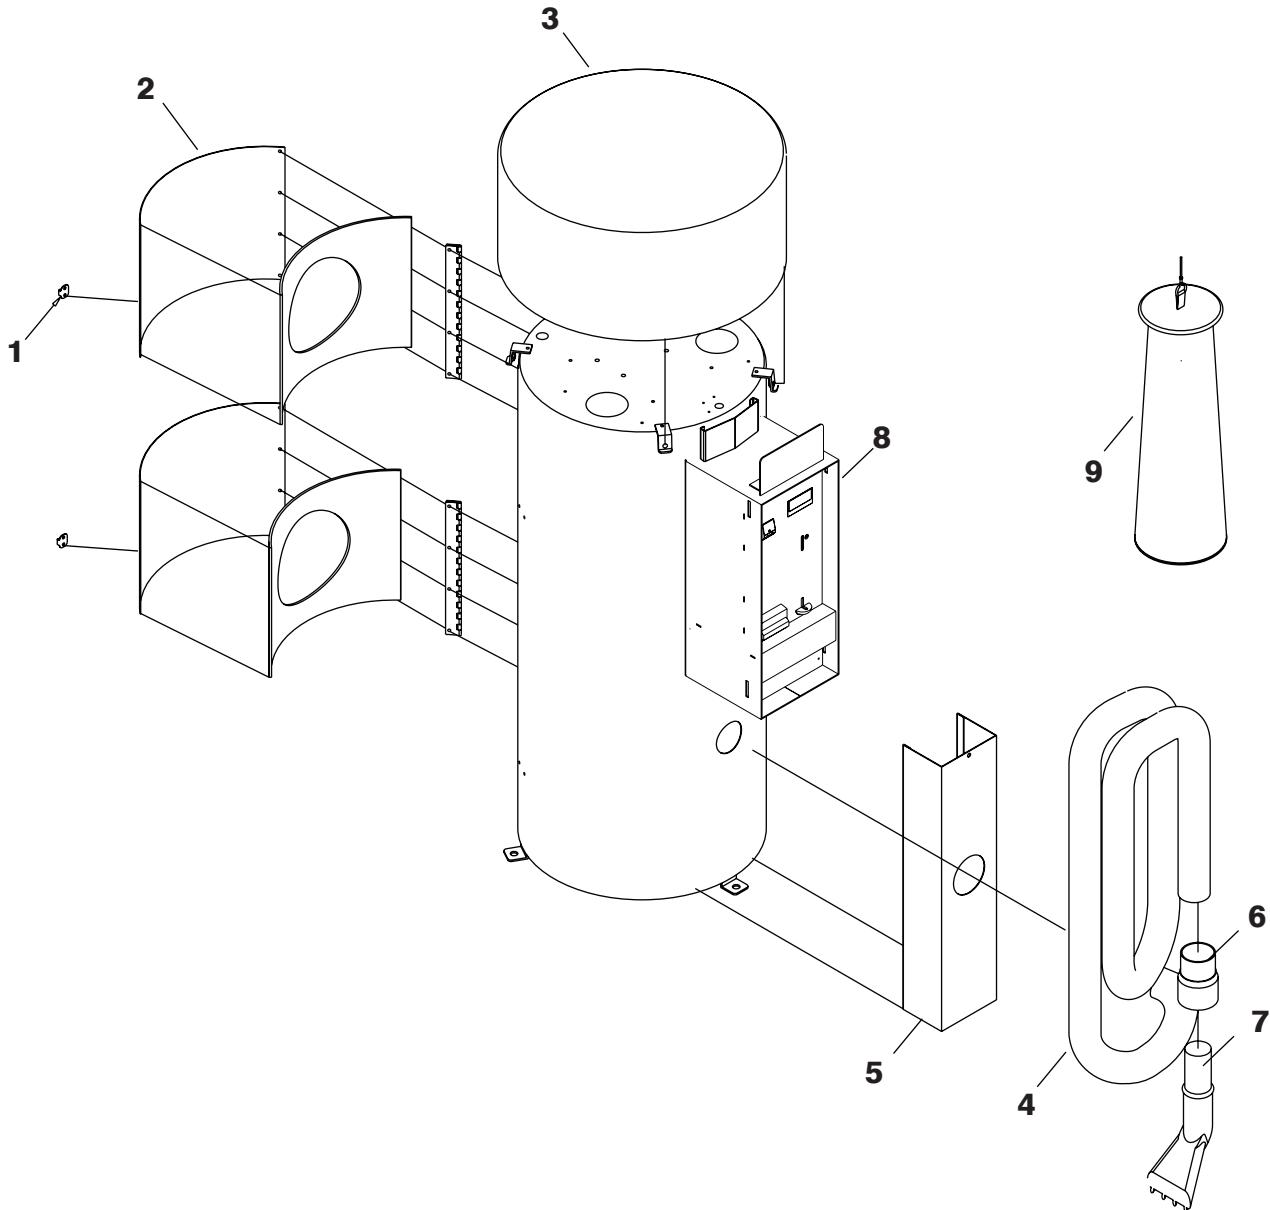

### Part Description

Part Description	Part Number
1 Latch and strike kit (2 pack)	1047060
2 Clean-out door (complete)	1058120
3 Dome	1025000
4 Hose 2" x 15'	1040010
5 Hose channel	1058020

### Part Description


Part Description	Part Number
6 2" cuff	1021040
7 2" tool (claw)	1082000
8 Meter Box	149600
9 Filter bag (set of 4)	10290000





MODEL 240000

## Parts Sheet - Coin Box Components

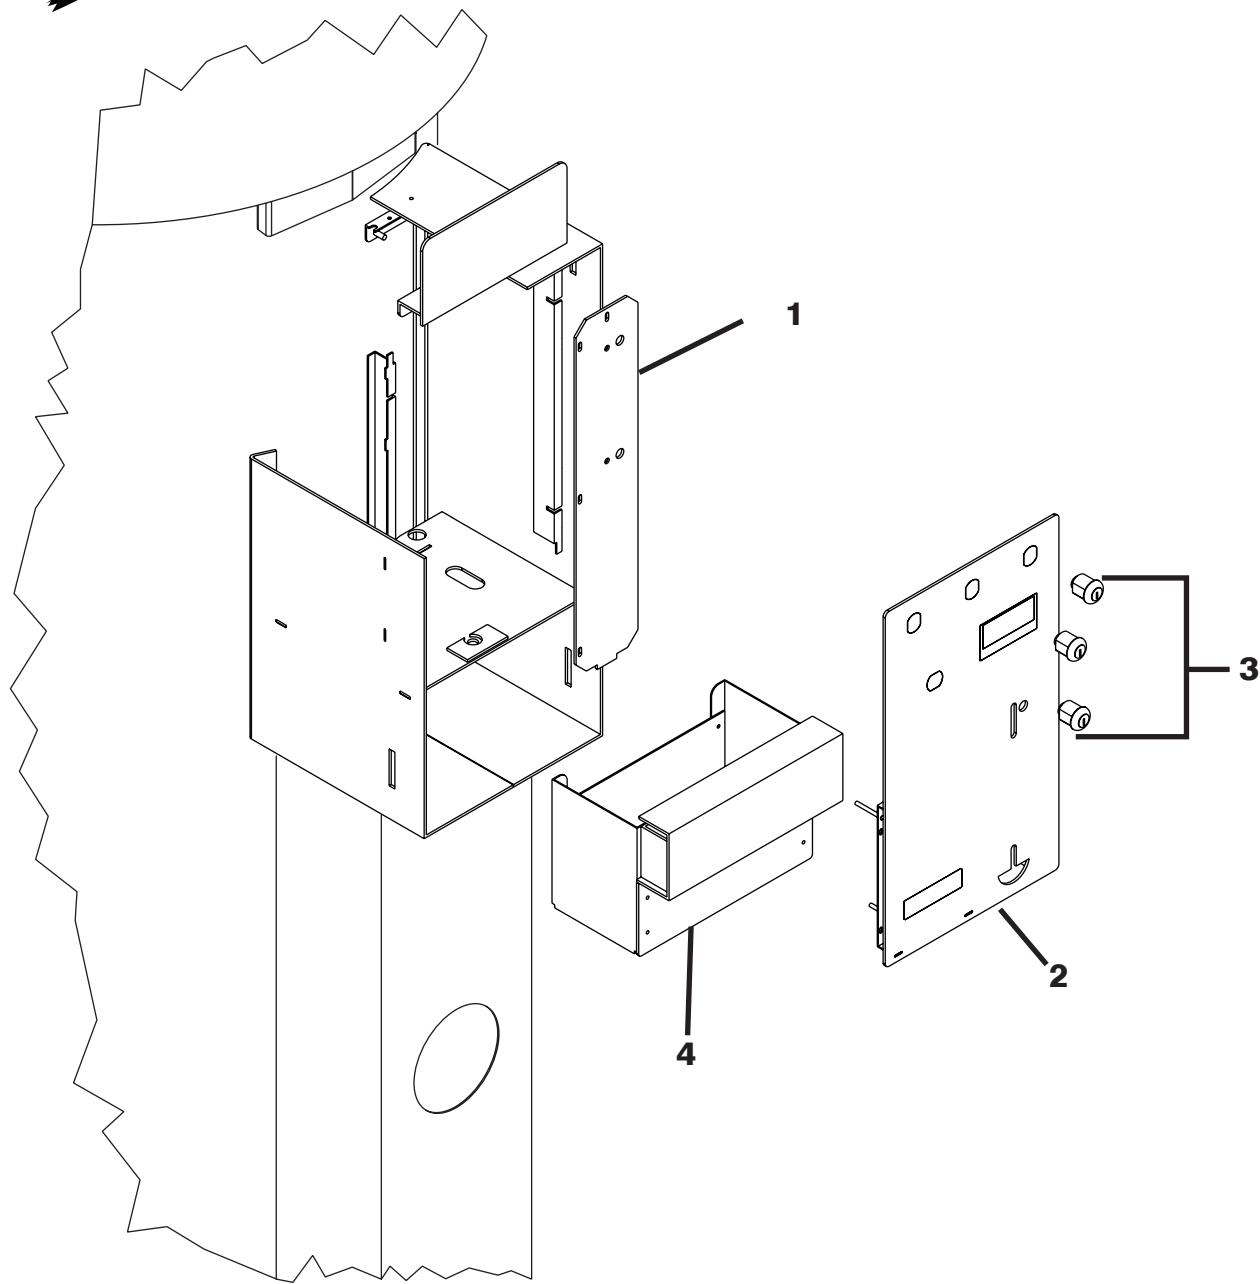

Part Description	Part Number	Part Description	Part Number
1 Timer Bracket	14100100	3 Cabinet Door Cam Lock	2210000
2 Meter Panel	1494240	- without Bill Acceptor	5048140
		- with Bill Acceptor	
		4 Lock and Drawer (refer to Options Section)	




© 2017 Industrial Vacuum Systems



MODEL 240000

## Parts Sheet - Coin Box - Electrical

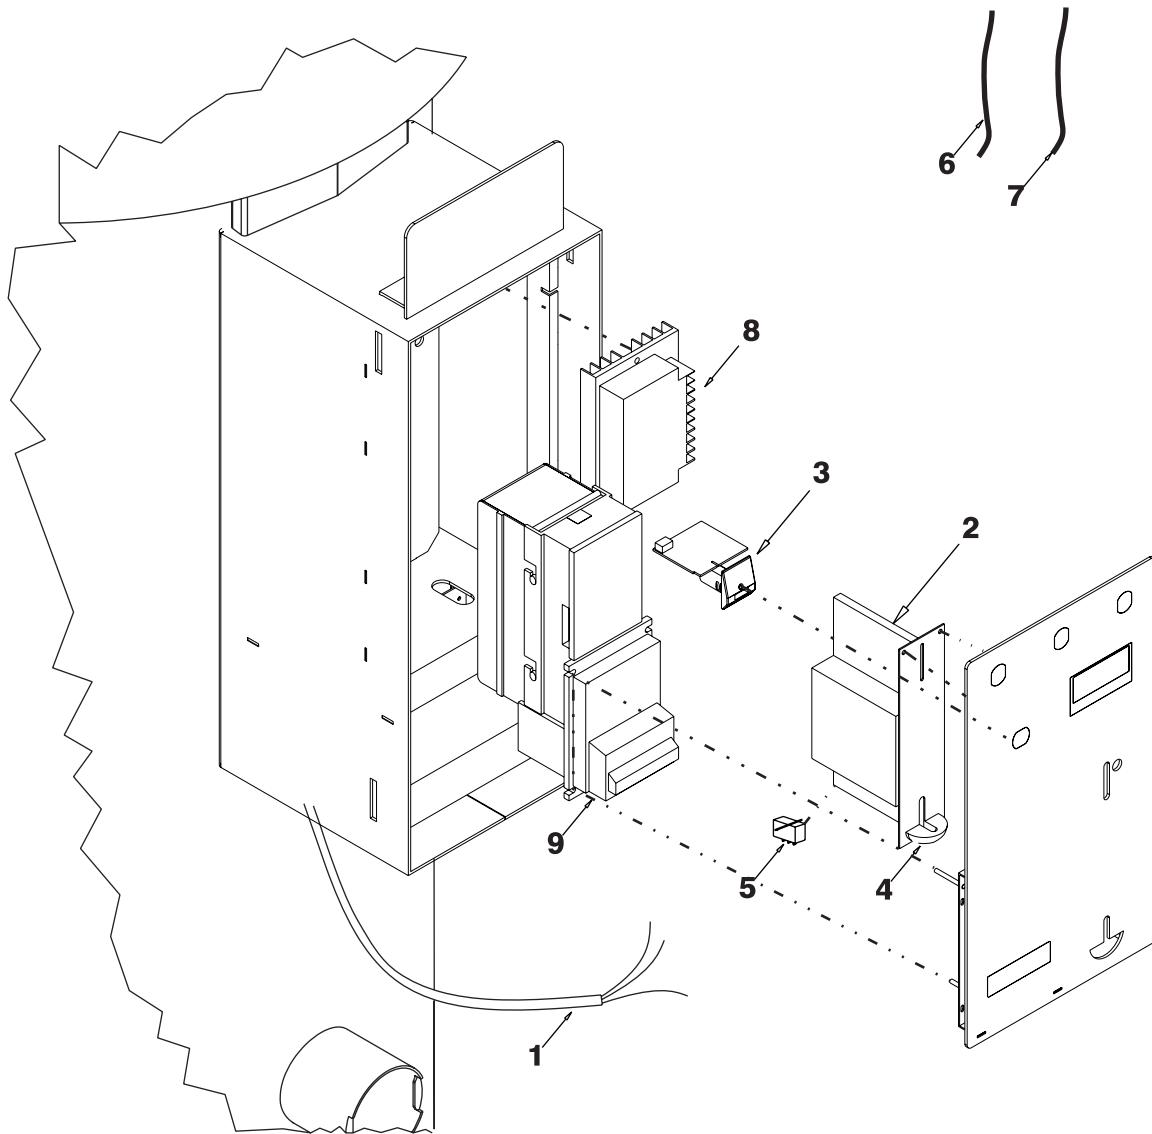

### Part Description

- 1 Electrical Power Supply Wires
- 2 Refer to Options Section
- 3 Refer to Options Section
- 4 Coin Return Stop
- 5 Coin Switch

### Part Number

1002060  
1077010

### Part Description

- 6 Red Coin Switch Wire 1091000
- 7 White Coin Switch Wire 1091010
- 8 Refer to Options Section
- 9 MARS Bill Acceptor (optional) 283500




© 2017 Industrial Vacuum Systems



MODEL 240000

## Parts Sheet - Dome

Applicable on models  
produced after March 2010

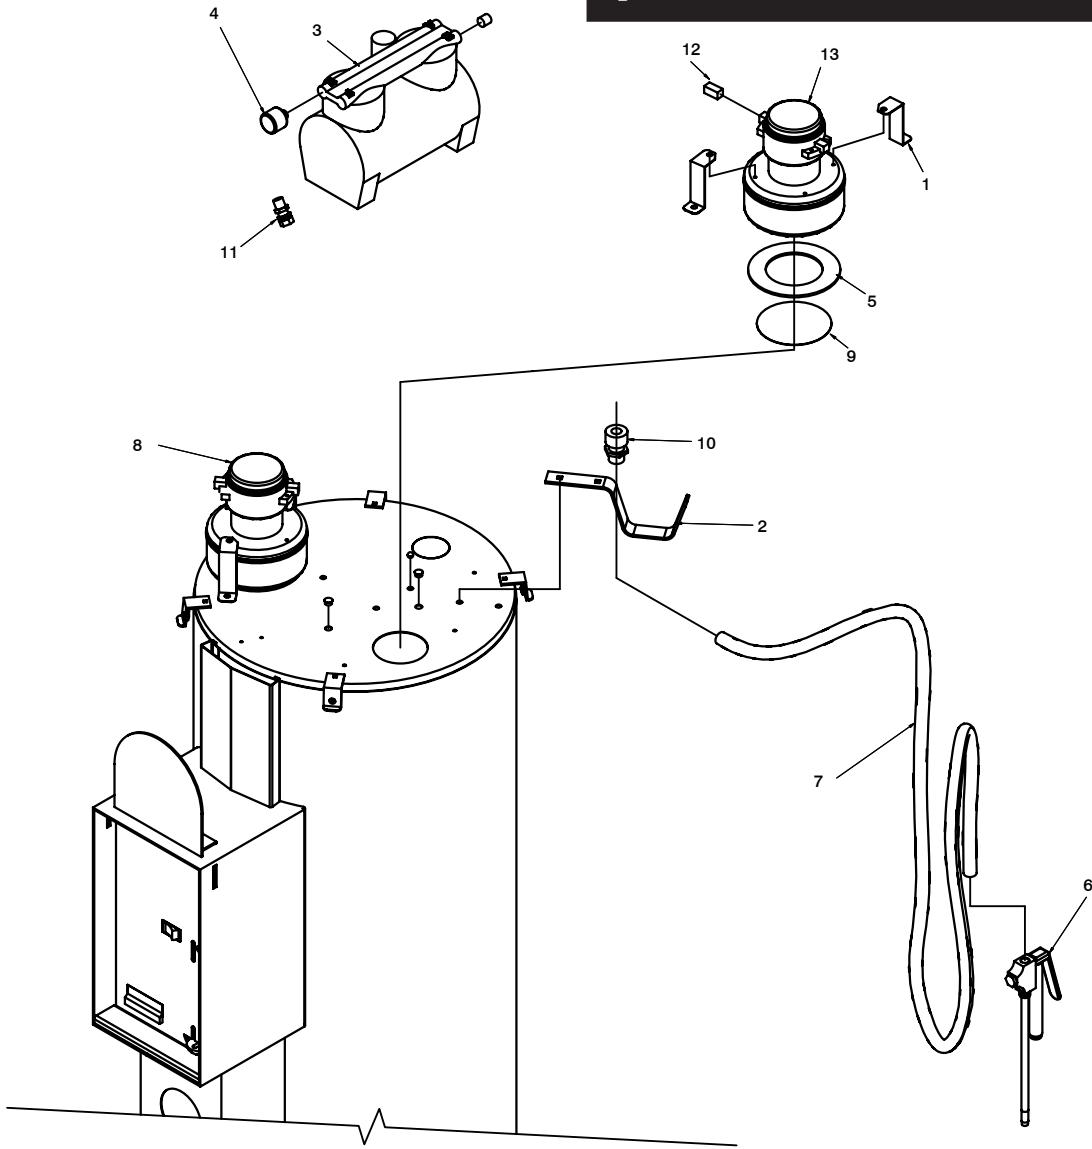


Part Description	Part Number	Part Description	Part Number
1 Motor mount bracket (qty = 4)	1010000	7 Air hose 25 ft. cut resistant	1040020
2 Air hose hanger	10100600	8 Vac Motor - Call for assistance (qty of 2)	1051110
3 Thomas compressor 2685PE	1017100	9 Filter screen (included w/motor, qty of 2)	10680000
4 Compressor filter	1029010	10 Hose grip	10700000
5 Motor gasket (qty = 2)	1033010	11 Pressure relief valve	1087000
6 Inflator w/whip and gauge	1034020	12 Motor brush kit (Call for assistance)	CALL



© 2017 Industrial Vacuum Systems

Applicable on models  
produced prior to March 2010

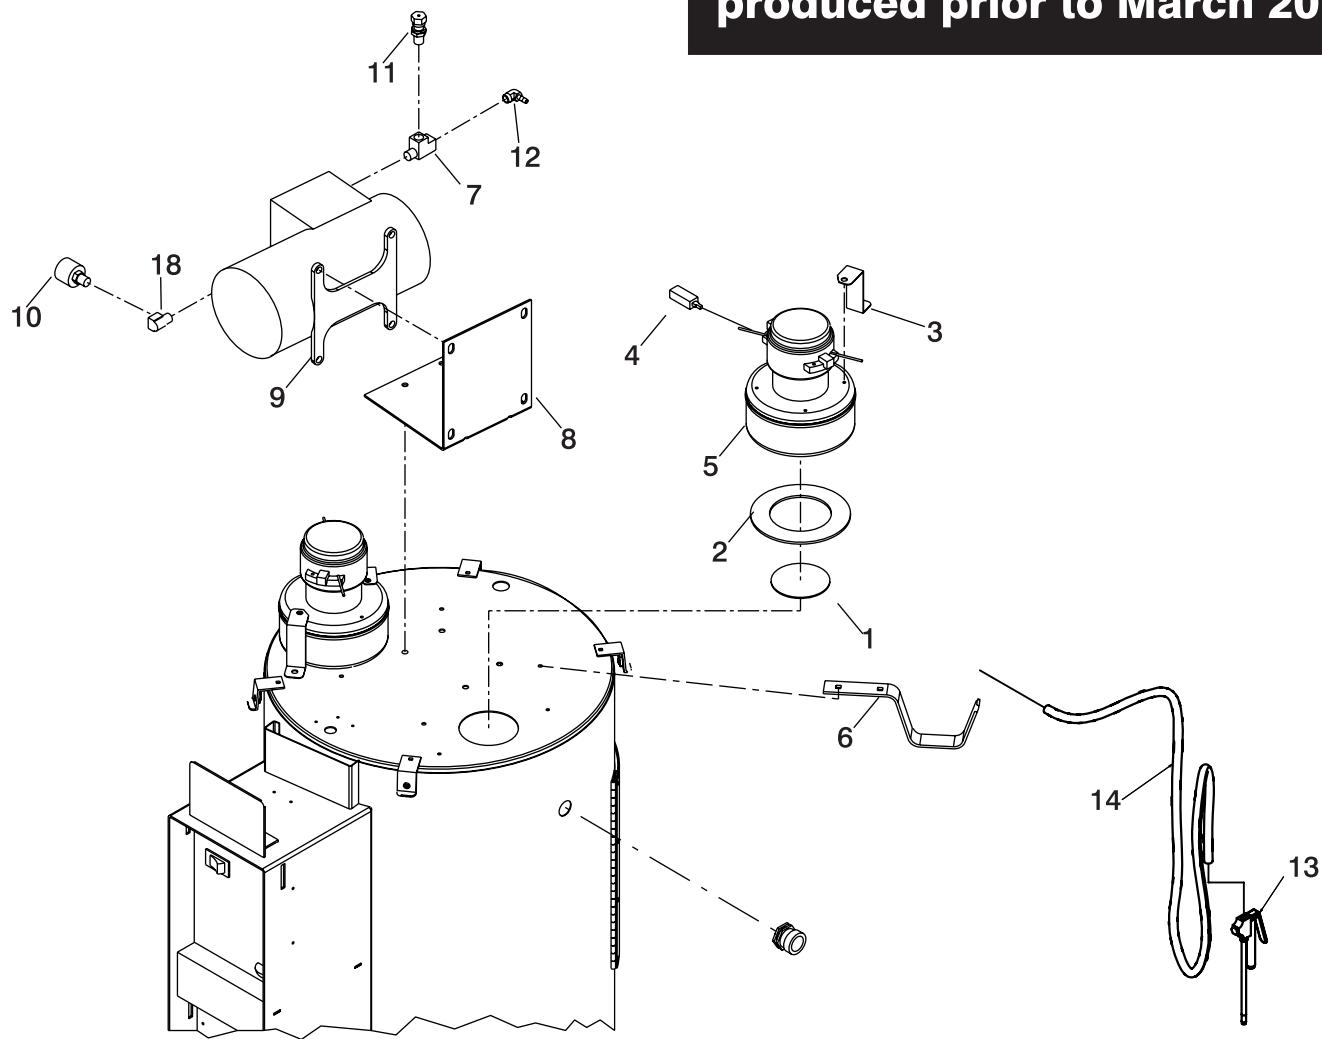

Part Description	Part Number	Part Description	Part Number
1 Screen (2 pack)	1068000	8 Compressor Bracket	1010030
2 Motor Gasket (2 pack)	1033010	9 Compressor	1017010
3 Motor Bracket w/Hardware (2 pack)	1010000	10 Compressor Filter	1029010
4 Motor Brush*	1011100	11 Pressure Relief Spring Valve	1087000
5 Please refer to options section*		12 Elbow Fitting	1030070
6 Air Hose Hanger Kit	10100600	13 Inflator w/whip and gauge	1034020
7 T-Fitting 1/4" NPT	1030100	14 Air hose 25 ft. cut resistant	1040020


\* Please contact IVS for proper replacement process.





MODEL 240000

## Parts Sheet - Decals



2

### DANGER

This equipment incorporates parts such as switches, motors, or the like that tend to produce arcs or sparks that can cause an explosion. When located in gasoline-dispensing and service stations, install and use at least 20 feet horizontally from the exterior enclosure of any pump and at least 18 inches above a driveway or ground level.



Part Description	Part Number	Part Description	Part Number
1 Refer to options section		5 Refer to options section	
2 Warning Label Decal Kit	DKPV100	6 Meter Panel Decal	102327
3 \$.75 Price decal	1023070	7 Air/Vac Select	1023960
4 \$1.00 Price decal	1023080		



© 2017 Industrial Vacuum Systems




MODEL 240000

## Unit Options

### Hoses and Accessories

1040010	Gray - 2" x 15' Hose (standard)
1040100	Red/Gray - 2" x 15' Hose
1040120	Yellow/Gray - 2" x 15' Hose
1040110	Blue/Gray - 2" x 15' Hose
1040140	Green/Gray - 2" x 15' Hose
1040390	Black - 2" x 15' Hose
1040050	Gray - 2" x 25' Hose
1040070	Gray - 2" x 50' Hose
1040000	Gray - 1½" x 15' Hose (Requires 10210500)
1040080	Gray - 1½" x 25' Hose (Requires 10210500)
1040060	Gray - 1½" x 50' Hose (Requires 10210500)
1040090	Gray - 2" to 1½" x 15' Tapered Hose
1040090	Blue/Gray - 2" to 1½" x 15' Tapered Hose
10210500	2" - 1½" Reducer

### Timers and Accessories




774030	GS-403 Timer (standard)
1080020	IDX 411E
1080070	IDX AT-411 EL 24V
1080030	Dixmor LED7 with Buzzer (requires 1078030)
10801400	IDX LTT 802 Little Two Timer (requires 1078030)
1078030	Transformer
1062040	Motor Relay & Socket 120/24 115 Vac

### Coin Acceptors

7704200	GinSan GS-41 Sensortron 2"
1002050	Coin Mech 2" (standard)
1002300	Imonex Acceptor
1002350	IDX X-10 Multicoin 2" Acceptor
1077010	Coin Mech 2" Switch
1002580	Microcoin QL
1002650	IDX MA-820 Coin/Token Acceptor


### Debris Bags

1007000	Vinyl Debris Catcher with bracket
1007070	Poly Debris Catcher



### Latch Security

1045290	Clean-Out Door Lock Shroud Brush Finish
---------	---






MODEL 240000

## Unit Options

### Lighted Dome Kit



1025000	Brushed Stainless Steel Dome (standard)
1025010	Mirrored Stainless Steel Dome
1025020	Red Poly Dome
1025030	Yellow Poly Dome
1025040	White Poly Dome
1025050	Green Poly Dome
1025070	Blue Poly Dome
1045070	Quiet Kit for Dome
1045500	Dome Light Kit (120V)
1045510	Dome Light Kit (240V)
504604	Lamp (120V)
504610	Lamp (240V)

### Motors

1051140B	120V motor (standard)
1051150A	240V motor

### Brush Kits


1011120	Brush - Motor 131600 (120V)
1011130	Brush - Motor 119816 (240V)
1011100	Brush - Electro Motor (120V)
1011110	Brush - Electro Motor (220V)
1011000	Brush - Motor 116336-00 (115V)
1011010	Brush - Motor 116125-00 (240V)

**Note:** This Power Vac unit can be equipped with a third motor. The third motor cannot be ordered and installed after purchase of unit.



© 2017 Industrial Vacuum Systems

## Pin Lock Security

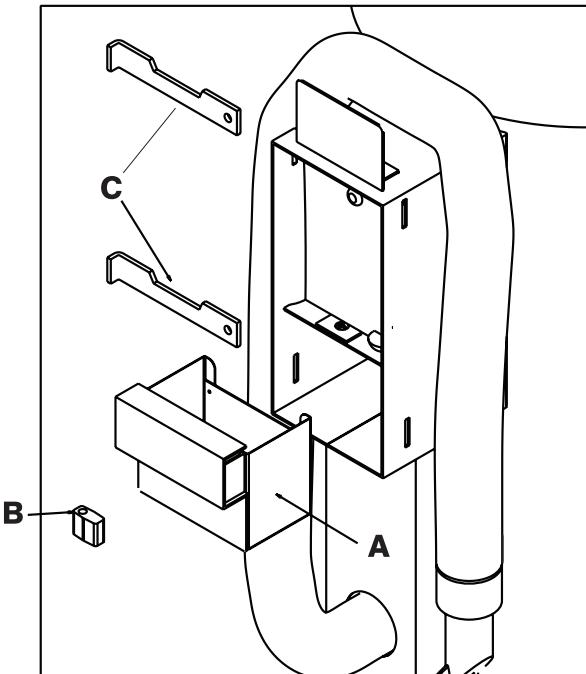


### Standard

149603 A Pin Lock Drawer (standard)  
104801 B Pin Lock (standard)

### Options

149419 C Security Bar  
(Cost is 1 per. With 2 possible Locations)

## American lock Security Options

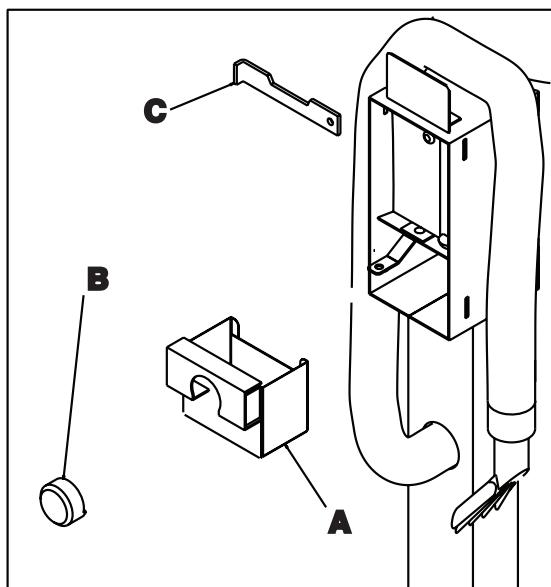

### Standard

149602 A American Lock Drawer  
104809 B American Lock

### Options

149419 C Security Bar  
(Cost is 1 per with 2 possible locations.)

